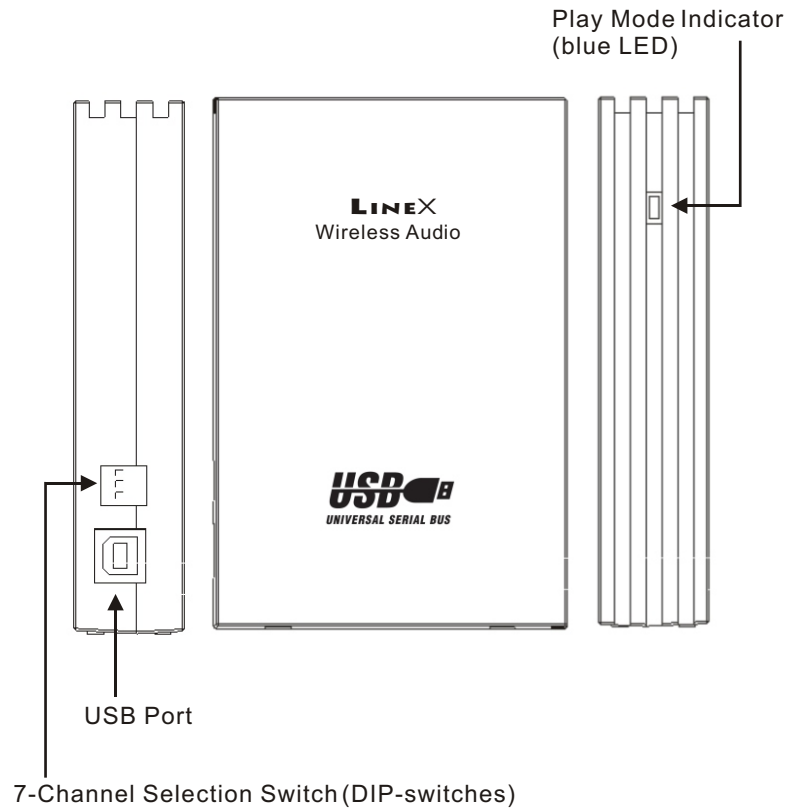


## USB FM Transmitter Wireless Stereo Music Adapter



### FEATURES

- Play your computer music (like MP3, WMA files) through your Home Stereos
- Extra stable transmission, PLL synthesized
- 7-Channel selection
- Single wire easy connection
- No sound card required
- USB bus-powered, no batteries or AC adaptor is necessary
- Slim and lightweight design

### GENERAL OPERATION

- Connect the USB cable to the USB port on the transmitter and connect the other end of the USB cable to your computer.
- Your computer will recognize the transmitter as an USB audio device and it can be operated by the standard driver of Windows or Mac OS.
- Open your audio application software such as Windows Media Player and play your music. Then the blue LED of the transmitter will light up.
- One of the seven FM frequencies can be selected for your listening region. Select an FM frequency in your area that is not being used.
- Adjust the frequency by setting the DIP-switches according to the Frequency Selection Chart.
- Turn on your home radio and set to FM band. Tune your radio to the same frequency that you selected on the transmitter.
- Adjust the volume level of your computer to get a distortion free signal.

## TROUBLESHOOTING

USB connected with music playing, but the blue LED does not light up.

- 1) Restart the audio application software.
- 2) Restart your PC/Mac.

USB connected with music playing, but no sound from the radio.

- 1) Check if the frequency selection of the radio is the same as the transmitter
- 2) Change the transmission frequency.

## PRECAUTION

Never try to disconnect the USB cable while an audio application software is playing music.

## CORRESPONDENCE OS

Windows XP

Windows Millennium Edition

Windows 98 SE

Windows 2000 Professional

Mac OS X 10.0.4 ~ 10.1.3

Mac OS 9.02 ~ Mac OS 9.1

## BOX CONTENTS

- 1) USB Wireless Stereo Audio Transmitter
- 2) USB Cable (~1m)
- 3) User Manual

## SPECIFICATIONS

Interface : USB Rev.1.1

Transmitting frequencies: 106.7, 106.9, 107.1, 107.3, 107.5, 107.7, 107.9MHz

Modulation : FM








Frequency response : 20Hz ~ 15kHz

Power Consumption : 5V 100mA (Maximum)

Operating temperature : 0°C ~ 45°C

Size : 25mm (W) x 120mm (H) x 80mm (D)

Frequency Selection Chart

	106.7MHz		107.5MHz
	106.9MHz		107.7MHz
	107.1MHz		107.9MHz
	107.3MHz		