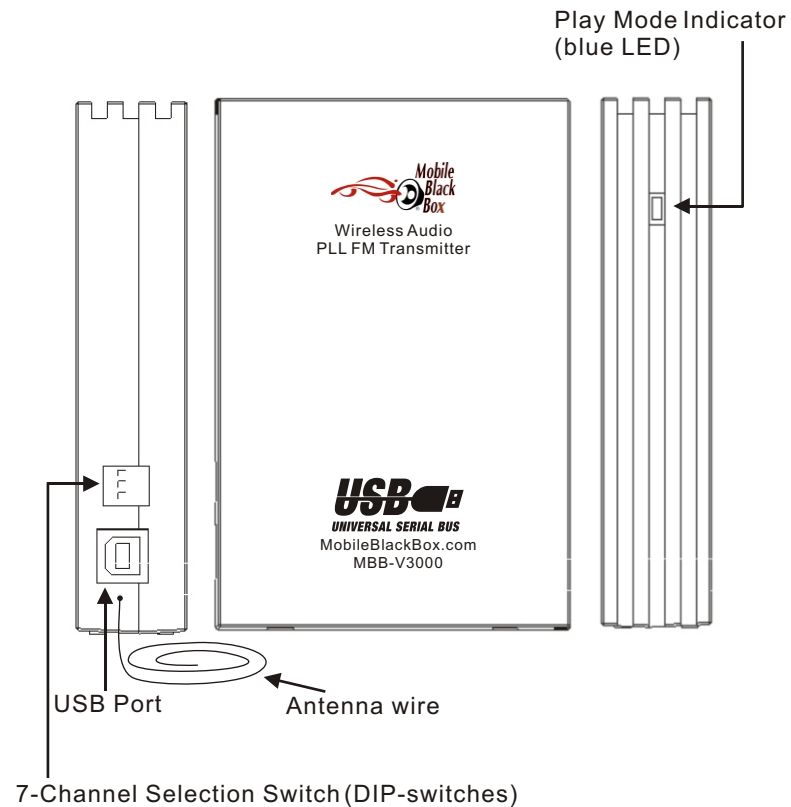


## USB Wireless FM stereo transmitter



## FEATURES :

Broadcasts all audioformats such asMP3, WMA, WAV, AAC, etc., or audio from CD.DVD.

PLL synthesized / Digitally tuned for extra stable transmission.

Works with orwithout a soundcard.

USB Bus powered: NO batteries orAC adapter needed.

True Plug N' Play: NO drivers to install or update.

Single USB wire connection - NO speaker wires needed.

Seven Transmission frequencies: 106.7, 106.9, 107.1, 107.3, 107.5, 107.7, 107.9 MHz

Transmit any audio from your computer to any FM radio within your Home/Office/Car in stereoand it works indoors and outdoors.

## GENERAL OPERATION :

Connect the USB cable to the USB port on the transmitter and connect the other end of the USB cable to your computer.

Your computer will recognize the transmitter as a USB audio device and it will utilize the standard driver from Windows or Mac operating systems.

Open your audio application software such as Windows Media Player and play any music or audio. The blue LED light on the transmitter will light up, indicating that the music/audio is being transmitted.

One of the seven FM frequencies can be selected for your listening region. Select an FM frequency in your area that is not being used.

Adjust the frequency by setting the DIP-switches according to the Frequency Selection Chart.

Turn on your home radio and set to FM band. Tune your radio to the same frequency that you selected on the transmitter.

Adjust the volume level of your computer to get a distortion free signal.

### Trouble-shooting :

USB connected with music playing, but the blue LED does not light up.

- 1) Restart the audio application software.
- 2) Restart your PC/Mac.

USB connected with music playing, but no sound from the radio.

- 1) Check if the frequency selection of the radio is the same as the transmitter.
- 2) Change the transmission frequency.

For update trouble-shooting tips and help visit: <http://www.mobileblackbox.com>

### PRECAUTION :

Never disconnect the USB cable while an audio application is playing music.

### Supported under the following operation systems:

Windows XP

Windows Millennium Edition

Windows 2000 Professional/Server

Windows 98 SE

Mac OS X Panther

Mac OS X 10.0.4 - 10.1.3

Mac OS 9.0.2 ~ Mac OS 9.2

Linux (Only compilations that support USB audio)

### Box Contents:

- USB Wireless Stereo Audio Transmitter
- USB Shielded LED Cable (1.2m)
- User Manual

### SPECIFICATIONS :

Model : MBB-V3000

Interface : USB Rev.1.1

Transmitting frequencies: 106.7, 106.9, 107.1, 107.3, 107.5, 107.7, 107.9MHz

Modulation : FM








Frequency response : 20Hz ~ 15kHz

Power Consumption : 5V 100mA (Maximum)

Operating temperature : 0°C ~ 45°C

Size : 25mm (W) x 120mm (H) x 80mm (D)

Frequency Selection Chart

	106.7MHz		107.5MHz
	106.9MHz		107.7MHz
	107.1MHz		107.9MHz
	107.3MHz		