




Mobile Black Box V5000 Series Wireless FM TRANSMITTER
PLL Synthesized – Stereo Audio

GENERAL OPERATION:

- (FOR POWER SOURCE) Connect 2.5mm phono end of the supplied power cable to the V5000 transmitter power jack and connect USB AM end of the cable to the computer's USB port or supplied car adapter or A/C adapter. You may also use 3 'AA' batteries for power source.
- (FOR AUDIO SOURCE) Connect one end of the supplied audio cable to the AUDIO IN jack of the V5000 transmitter and connect other end of the cable to the audio line output or headphone jack of computer's sound card, MP3 player, portable DVD player, PDA, etc.
- Power on your V5000 wireless audio transmitter and the LED will light up.
- Turn on your audio source and set the volume to medium.
- Turn on your car or home radio to medium volume and set to FM band. Then tune your radio to 106.7 or 88.0 (default factory setting of the V5000 transmitter).
- The radio should receive a strong and clear music signal coming from your audio source. If not, set the channel selection switch on the transmitter to change the transmission frequency (see the channel selection chart). Tune your radio to the frequency you selected on the transmitter to receive the music.
 Note: you may try all the 7 channels to select the frequency for the best transmission. You can preset the transmitter frequency on you radio and then directly tune the radio to that frequency in the future.
- Adjust the volume of your music source to a distortion free level which will help minimize distortion and noise. A general rule to follow is to increase the audio input level just below the point where distortion appears. You can also increase the volume of your car radio for desired sound level.
- (Battery power only) If the LED becomes dim, the batteries may be weak. Replace all the batteries to maintain best transmission.

Channel- Frequency Selection Charts

	88.0MHz		88.8MHz
	88.2MHz		89.0MHz
	88.4MHz		89.2MHz
	88.6MHz		
			106.7MHz
			106.9MHz
			107.1MHz
			107.3MHz
			107.5MHz
			107.7MHz
			107.9MHz

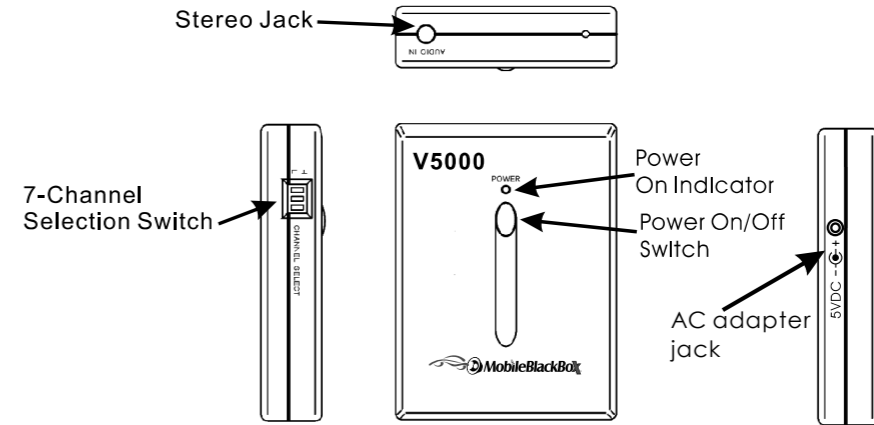


Features:

- Transmit any stereo audio from your notebook/desktop PC/MAC to any FM receiver within range.
- Transmit any stereo audio from your PDA, MP3 player, DVD player, etc or any other personal audio/video device, to any FM receiver within range.
- 4-way power capabilities: USB, 3 'AA' batteries, 12/24V Car power, 100/240 A/C power (Batteries not included)
- Battery operation life: 150 hours (alkaline)
- 7 Channel/frequency selection
- Gold plated 5Ft. audio cable
- 5Ft. USB multi-use blue LED light-up cable.
- Slim light-weight design

Package contents:

- (1) V5000 Mobile Black Box FM transmitter
- (1) 5ft. USB/2.5mm ultra glow cable
- (1) 5ft. 3.5mm/3.5mm gold plated audio cable
- (1) 12/24V Car power adapter
- (1) 100-240V A/C adapter

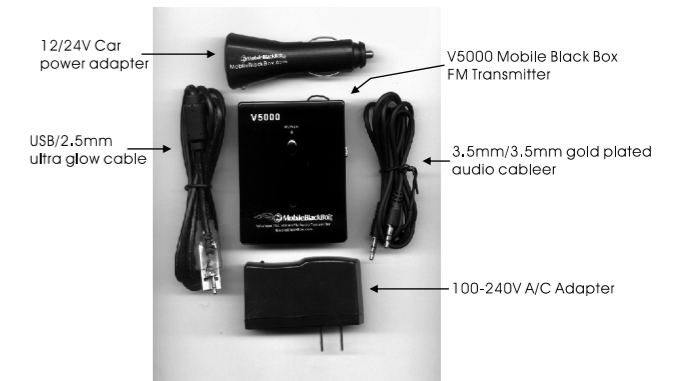

Specifications:

- Model: V5000
- Power source options:
 - 1. PC/MAC computer USB power
 - 2. (3) three AA alkaline batteries (Batteries not included)
 - 3. Car 12/24V source with car adapter
 - 4. 100/240 A/C with adapter.
- Transmitting frequencies: 88.0, 88.2, 88.4, 88.6, 88.8, 89.0, 89.2 MHz
- 106.7, 106.9, 107.1, 107.3, 107.5, 107.7, 107.9 MHz
- Modulation: FM
- Frequency response: 20Hz ~ 15KHz
- Unit size: 65mm(W) X 85mm (H) X 18mm (D)

For support and trouble-shooting tips go to <http://www.mobileblackbox.com>

